


ENCASED AUTOTRANSFORMERS

ARW

Autotransformer regulators serve the purpose of airflow control, fitted in single-phase ventilation and heating systems. The transformers are made with Class II insulation and protection grade IP30 or IP54, maximum ambient temperature 40°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-13.



Rated power :1 - 10A
Rated voltage PRI :230 V 50/60 Hz
Rated voltage SEC :5-step regulation

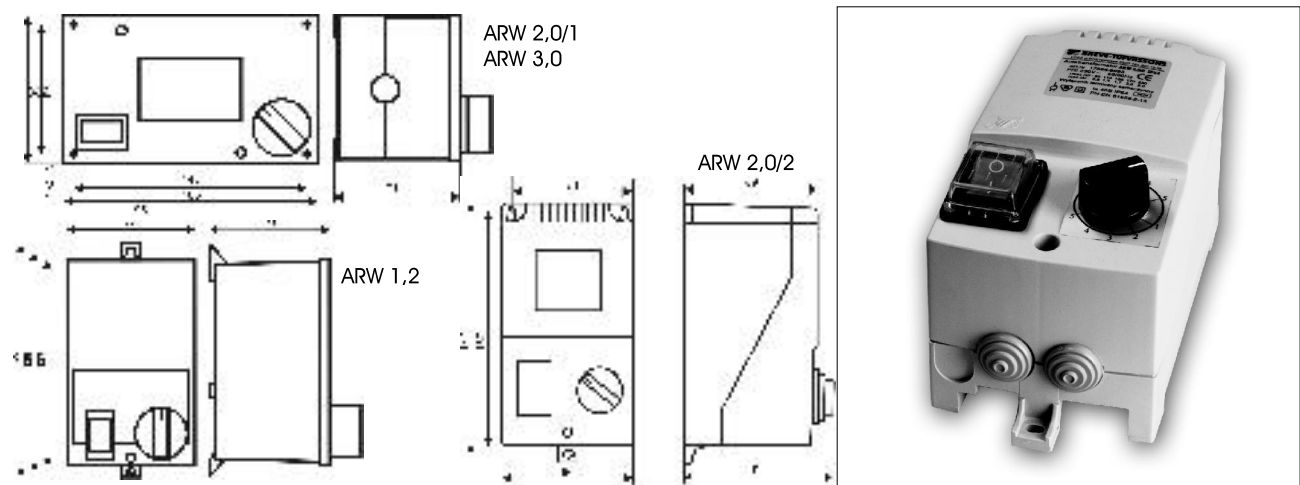

Typ	Prąd [A]	Wymiary					Moco- wanie	Masa kg
		A	B	C	D	E		
ARW 1,2/1	1,2	77	138	71	38,5	128	M4	1,40
ARW 2,0/2 IP54	2	96	166	91	78	148	M4	2,30
ARW 3,0	3	96	166	91	78	148	M4	2,50

Wersje wykonania regulatorów

Typ	ART. NR	Upri [V]	Stopnie regulacji Ur[V] / Ir[A]				
			1	2	3	4	5
ARW 1,2/1	17786-9999	230	115/0,9	135/1,0	155/1,1	180/1,2	230/1,2
ARW 2,0/2 IP54	17786-9993	230	65/0,9	110/1,5	135/1,7	170/2,0	230/2,0
ARW 3,0	17786-9998	230	115/2,4	135/2,6	155/2,8	180/3,0	230/3,0

Z uwagi na ciągły rozwój konstrukcji oraz zmiany wymagań technicznych, firma Breve-Tufvassons zastrzega sobie prawo zmian w/w parametrów.